


Resistor MRE




Part no.	Description 4-speed resistor	Ω value	Current	Dimensions (w x h)	mounting
MRE 16.0027	suitable for BL 650, B40 and B50 blower 12 V DC <i>high speed version</i>	0,3 Ω ~ 1,1 Ω	40 W	52 x 85 mm	vertical
MRE 16.0028	suitable for BL 650, B40 and B50 blower 12 V DC	0,3 Ω ~ 1,3 Ω	40 W	52 x 85 mm	vertical
MRE 16.0017	suitable for BL 650, B40 and B50 blower 24 V DC	0,45 Ω ~ 2,1 Ω	30 W	52 x 85 mm	vertical

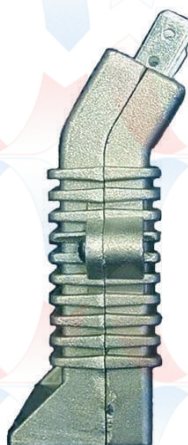

Part no.	Description 3-speed Resistor
MRE 16.0035	R1 suitable for SPAL B39, B40 and B50 12V DC incl bracket
MRE 16.0036	R1 suitable for SPAL B39, B40 and B50 24V DC incl bracket

Resistors MRE

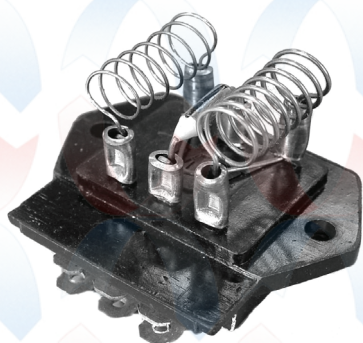

Part no.	Description Resistor	Ω value	Current	Dimensions (h x w x d)	Temp. fuse
MRE 16.0001	WH0004 (build-in) suitable for 650, 850 and 1250 blowers 12 V DC	3R0K - 3R6K	30 + 20 W	35 x 44 x 58 mm	152 °C
MRE 16.0002	WH0003 (build-in) suitable for 650, 850 and 1250 blowers 24 V DC	3R2K - 3R6K	30 + 20 W	35 x 44 x 58 mm	152 °C